
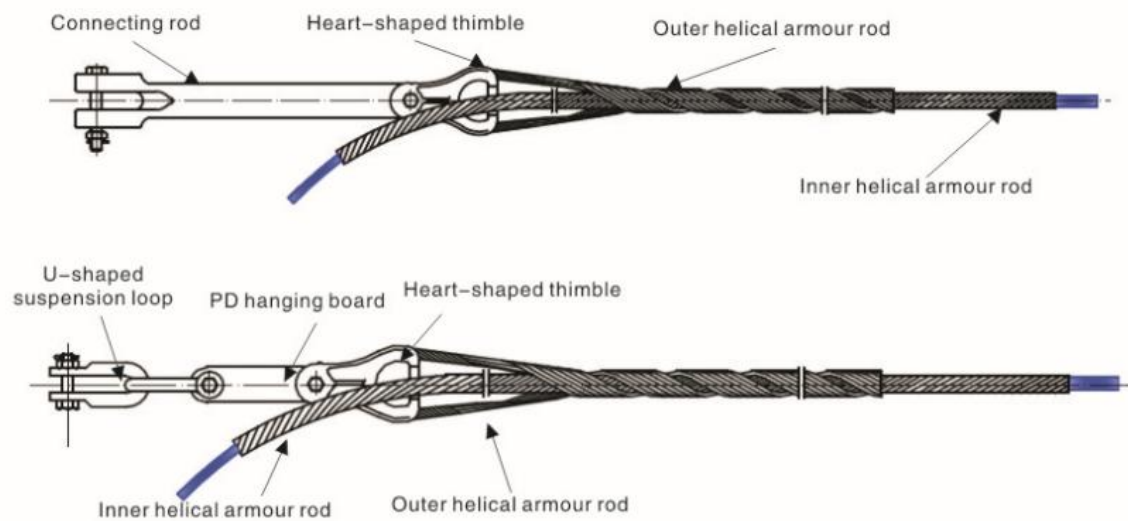


## Tension Set for Medium Span

### Application:

The Tension set is used to connect towers and cable in erection of cable line. The specially designed helical armour rod may ensure proper grip strength and protect optical fiber of cable from squeezing damage, ensuring that the fiber signal transmission will not decay.

### Product Picture:

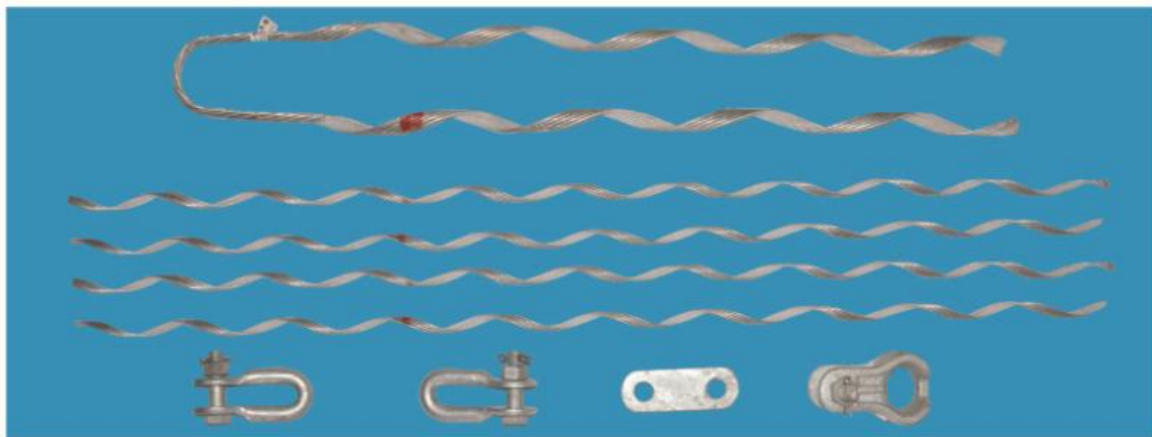

### Parameters:

No.	Applicable cable diameter(mm)	Installation span(mm)	Grip strength(KN)	Product weight(kg)
020-0940	9.0-9.4	200	20	1.06
020-1040	9.5-10.4	200	20	1.15
020-1150	10.5-11.5	200	20	1.18
020-1240	11.6-12.4	200	20	1.20
020-1340	12.5-13.4	200	20	1.30
020-1490	13.5-14.9	200	20	1.45
020-1590	15.0-15.9	200	20	1.50

**Performed Fittings**

030-0940	9.0-9.4	300	30	1.30
030-1040	9.5-10.4	300	30	1.40
030-1150	10.5-11.5	300	30	1.45
030-1240	11.6-12.4	300	30	1.50
030-1340	12.5-13.4	300	30	1.70
030-1490	13.5-14.9	300	30	1.75
030-1590	15.0-15.9	300	30	1.80
040-1040	9.5-10.4	400	40	1.65
040-1150	10.5-11.5	400	40	1.66
040-1240	11.6-12.4	400	40	1.72
040-1340	12.5-13.4	400	40	2.00
040-1420	13.5-14.2	400	40	2.05
040-1490	14.3-14.9	400	40	2.07
040-1590	15.0-15.9	400	40	2.10
040-1690	16.0-16.9	400	40	2.30
050-1150	10.5-11.5	500	50	2.10
050-1240	11.6-12.4	500	50	2.25
050-1340	12.5-13.4	500	50	2.52
050-1420	13.5-14.2	500	50	2.60
050-1490	14.3-14.9	500	50	2.65
050-1590	15.0-15.9	500	50	2.80
050-1690	16.0-16.9	500	50	3.15
060-1240	11.6-12.4	600	60	2.50
060-1340	12.5-13.4	600	60	2.80
060-1420	13.5-14.2	600	60	2.90
060-1490	14.3-14.9	600	60	2.95
060-1590	15.0-15.9	600	60	3.05
060-1690	16.0-16.9	600	60	3.40
070-1240	11.6-12.4	700	70	2.62
070-1340	12.5-13.4	700	70	2.96
070-1420	13.5-14.2	700	70	3.05
070-1490	14.3-14.9	700	70	3.07
060-1590	15.0-15.9	700	70	3.25
060-1690	16.0-16.9	700	70	3.60
060-1790	15.0-15.9	700	70	3.70
060-1890	16.0-16.9	700	70	4.82

\* Other type of tension set can be designed according to customer ' s requirements.